



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

Mongoose Products, Inc.
115 Lismore Ave.
Glenside, PA 19038

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (in Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Mongoose Ridge Vent

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews NOA No.11-0707.01 and consists of pages 1 through 3.
The submitted documentation was reviewed by Gaspar J Rodriguez.



NOA No. 16-0601.02
Expiration Date: 09/07/21
Approval Date: 09/22/16

ROOFING ASSEMBLY APPROVAL

Category: Roofing
Sub-Category: Ventilation
Materials: Plastic

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
Mongoose Ridge Vent	1¼" x 11" x 20'	TAS-100	Low profile attic ridge vent for installation under ridge shingles.

MANUFACTURING LOCATION:

1. Wrens, GA

EVIDENCE SUBMITTED:

<u>Test Agency</u>	<u>Test Name</u>	<u>Test Identifier</u>	<u>Date</u>
Architectural Testing	TAS 100(A)	56017.01-122-18	09/18/05
	ASTM D 1929	G1878.01-106-18	08/30/16
	ASTM D 635	G1878.01-106-18	08/30/16
	ASTM D 2843	G1878.01-106-18	08/30/16

APPROVED APPLICATIONS:

Tradename: Mongoose Ridge Vent

System Type C: Mechanical attachment of ridge vent under composition ridge shingle.

Slot: Cut a 3¼" slot along the apex of the roof by cutting 1⅝" on each side of the ridge. The 3¼" slot shall terminate approximately 6" from the rake edge.

Installation: Fold the 6" flap under the starting end (this creates an end cap) roll out ridge vent centered over the void, use the center line to help align the vent with the center of the ridge opening. Press Mongoose Ridge Vent to the roof, the glue strips will hold the vent to the roof shingles. Extend out to the rake edge.

When finished applying Mongoose Ridge Vent, use the extra 6" flap to create an end cap by folding the flap under the vent material.

When the ridge length is greater than 20', roll ends or cut joints shall be butted together and caulked with an approved polyurethane sealant under the 6" flap that must overlap the adjoining piece to create a water-tight seal.

Ridge Shingle: Install pre-manufactured or field cut ridge shingles over the ridge vent using 2½" ring shank galvanized roofing nails spaced 5" o.c. through the ridge shingles. Seal the exposed nail heads with an approved polyurethane sealant.

Net Free Area: Refer to manufacturers published literature

Minimum Slope: 3:12



NOA No. 16-0601.02
Expiration Date: 09/07/21
Approval Date: 09/22/16

LIMITATIONS:

1. Refer to applicable Building Code for required ventilation.
2. Mongoose Ridge Vent shall not be installed on roof mean heights greater than 33 ft.
3. Mongoose Ridge Vent shall be installed over composition shingles roofs only.
4. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 61G20-3 of the Florida Administrative Code.

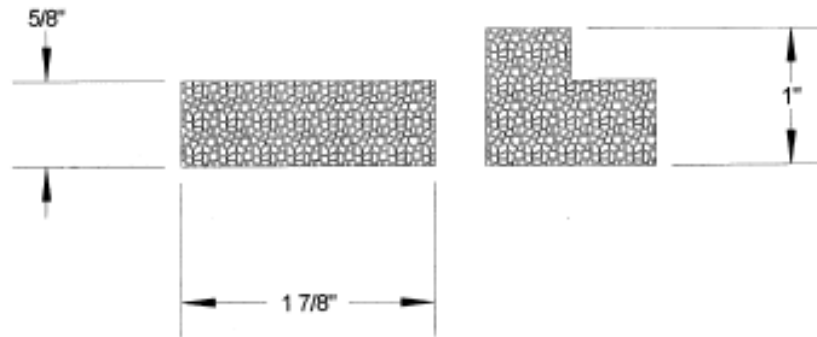
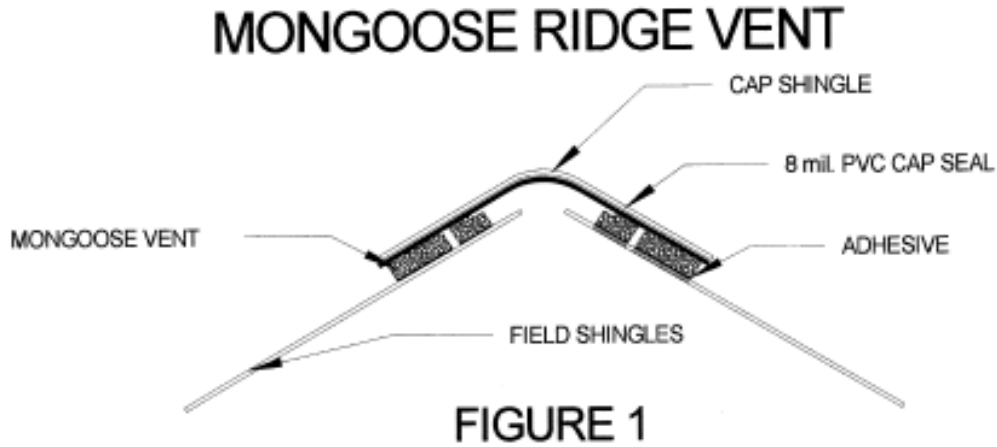


FIGURE 2

END OF THIS ACCEPTANCE